


## MM OK 100




**LONG life**  
30.000h




### Dimensions /mm/

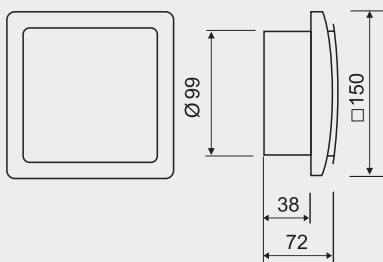

### Dimensions /mm/ With Shutter

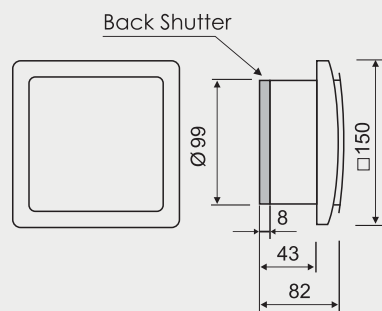

### Performance curves

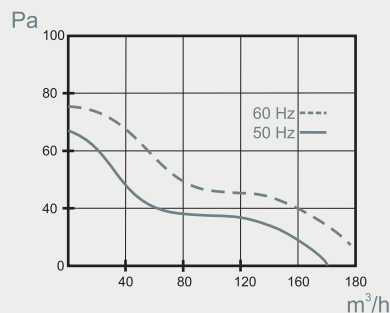

### Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Noiseless Energy Efficient
	No	No	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM OK 100	4680	2365									•					
MM OK 100T	-	-										•				
MM OK 100HT	-	-	50 / 230	2750	18	169	56	32	2,3	+60		•	•			
MM OK 100LT	-	-										•		•		
MM OK 100LED	-	-									•				•	
MM OK 100 UE	4673	4116	50 / 230	2020	5,5	100	X5	23	2,3	+60						•



### Legend

MM OK	Series name	LT	Light Relay & Timer	2S	2 Speed Fan
100	Size	LED	LED Light	C	Back Shutter /Accessory/
T	Timer	LV	Low Voltage Fan 12V		Products without a code are custom made
HT	Humidistat & Timer	UE	Noiseless - Energy Efficient		